



SM elektronika, d.o.o.
Moše 6, 1216 Smlednik
Slovenija
+386 1 362 82 00
info@led-sm.com
www.led-sm.com

DC
24

140°

480
LED s/m

CRI > 90




90
lm/W



LED TRAK COB - Long Run



SMHL COB4-480

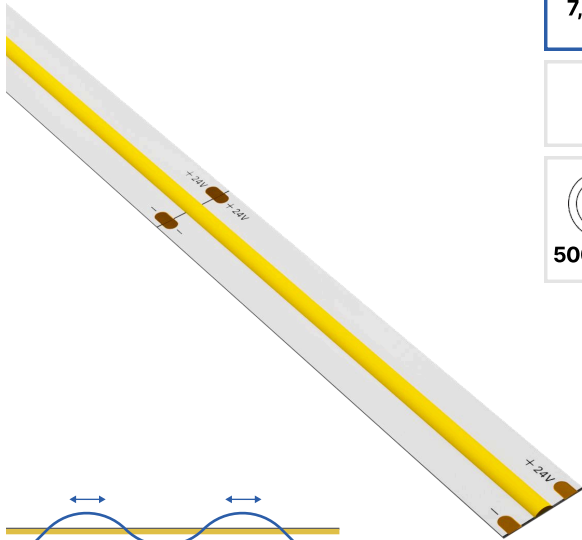

7,2 W/m

5 cm


50000 mm



Karakteristike

- Brez padca napetosti do 20 metrov.
- Trak primeren za osvetljavo stropov.
- Obvezna namestitvev traku na aluminijasto podlago.
- Možen rez na vsake 24 LED diode (24 V/CD)
- Za priklop na 230 VAC omrežje, obvezna uporaba LED napajalnika s konstantnim izhodom primerne napetosti in moči.
- Pri uporabi traku daljšega od 20 m, uporabite vzporedno vezavo.
- Temperatura delovanja = -20 °C do 40 °C.
- Pričakovana življenjska doba > 60.000 ur.
- Možnost regulacije jakosti svetlobe - dimanje.

7,2 W / meter	650 lm / meter	IP20	ONE BIN	SDCM ≤ 3	> 60k h
---------------	----------------	------	---------	----------	---------



Height	Eavg	Emax	Angle: 109.67deg	Diameter
1m	54.65	160 lx		346.45cm
2m	20.31	59.45lx		567.8cm
3m	9.02	26.42lx		851.71cm
5m	5.10	14.86lx		1135.62cm
7m	3.25	9.53lx		1419.52cm

Kat. št.	Naziv artikla	Napetost	Barva
5005561	SMHL COB4-480-NW	24 V	4000K
5005562	SMHL COB4-480-WW	24 V	3000K
5005563	SMHL COB4-480-SWW	24 V	2700K

Najbolj priporočljivi profili

L001 23 x 8 mm	BAR 1 25 x 13 mm	BAR MIDI 15 x 12 mm	BAR MIDI T 20 x 12 mm	BAR 4 18 x 13 mm	BAR 11 28,4 x 30 mm	L002 17 x 8 mm



LED SM
SMHL COB4-480



7,2
kWh/1000h



2019/2015